



Bulletin 1100A - Metric

NEW!

eco-Air™

INDUSTRIAL AIR COOLED CONDENSERS

FEATURING



ENVIRONMENTALLY **C**ONSIOUS **D**RY & **A**DIABATIC **O**PERATION
CERTIFIED ISO 9001 & ISO 14001



IARW International Association of
Refrigerated Warehouses

Member of
iiar
International Institute of
Ammonia Refrigeration
www.iiar.org

AHRP Air-Conditioning, Heating,
and Refrigeration Institute



Get to Know EVAPCO

- The global innovator in heat transfer solutions
- Serving the Commercial HVAC, Industrial Refrigeration, Power Generation, and Industrial Processing markets
- Founded in 1976
- Employee-owned
- 24 engineering & manufacturing facilities in 10 countries
- More than 170 sales offices worldwide

Learn More Now

Visit evapcoasia.com to download product catalogs, view complete product specifications, and more.

EVAPCO is more than a name.

It's a pledge to make everyday life easier, more comfortable, more reliable, and more sustainable for people everywhere. How do we fulfill that promise? It's simple.

We never stop innovating.

At EVAPCO, we don't just talk about innovation, it's ingrained in our workflow. Guided by our annually developed R&D plans, we set out to find groundbreaking solutions that transform the way the world works for the better. It's why we have more than 78 active patents.

We craft exceptionally built solutions.

As an employee-owned company, we take pride in our work. We are proud to be one of the most experienced teams of engineers and craftsmen in the industry. This translates into solutions that are always exceptionally built. EVAPCO has an unwavering commitment to provide "best in class" heat transfer solutions and services.

We guarantee performance.

Every EVAPCO solution is put through rigorous research and testing to ensure maximum efficiency and reliability. But we don't stop there. EVAPCO is an industry leader in independent, third-party performance certifications. These certifications guarantee our performance metrics—so that you can plan your projects with complete peace of mind.


We protect the environment.

Innovation and environmental sustainability go hand-in-hand at EVAPCO. Our industrial heat transfer equipment not only conserves natural resources and helps reduce noise pollution, but also features recycled steel content in construction. EVAPCO's stainless steel units are constructed of panels that contain up to 75% of recycled content, and our galvanized units contain over 80%. From sound reduction to water conservation to chemical elimination, we are continuously developing new technologies that deliver the ultimate operating advantages to our clients—while protecting the planet for every generation to come.



Full Spectrum Global Solutions

EVAPCO offers the full spectrum of condenser solutions from fully evaporative to fully dry.

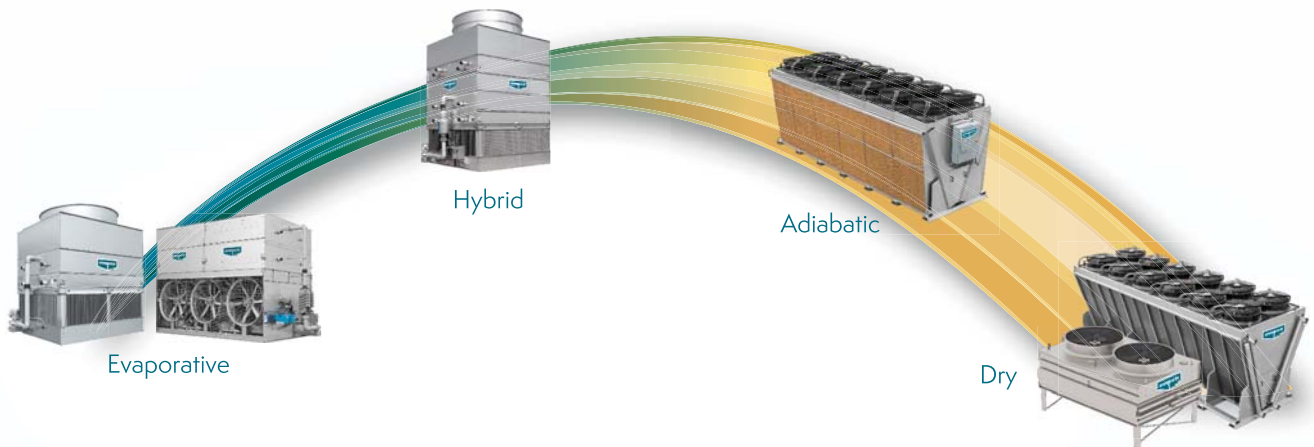

When water is limited, unavailable, or its use for cooling is undesirable, the **NEW** eco-Air Series from EVAPCO is an ideal solution to meet cooling demands.

The eco-Air Series of dry and adiabatic condensers offers unparalleled flexibility in a wide range of capacities, footprints, motor types, and control options.



EC Motor Option



AC Motor Option

EAVCA V Coil Adiabatic Models



EC Motor Option



AC Motor Option

EAVCD V Coil Dry Models



EC Motor Option



AC Motor Option

EAFCD Flat Coil Dry Models

eco-Air Design & Construction Features

The eco-Air Series of air cooled condensers represents EVAPCO's newest advancement in thermal heat transfer research and development. Available in fully dry and adiabatic designs, the eco-Air Series maximizes heat rejection with minimal or no water use. The eco-Air is another chapter in EVAPCO's ongoing commitment to quality, environmentally friendly products.

Heat Exchanger Coil

- Type 304L Stainless Steel tubes with Aluminum fins
- Multiple fin spacings and tube configurations
- Upgraded fin thickness available



Structure and Casing

- Standard Type 304L Stainless Steel for increased corrosion resistance and longevity
- G-235 galvanized steel available


Warranty

- 2 year complete unit
- 2 year Adiabatic Pads (if equipped)
- 1 year EVAPCO Controller and other electrical components (if equipped)



V Coil Models

- Maximum surface area per footprint
- Optimized coil angle for heat rejection and air flow
- Compact plan area and layout



Epoxy Coated Fins (Optional)

- Increased corrosion resistance
- No impact on unit capacity



Inspection Panel (V Coil Models)

- Easily removable for interior inspection and access to coils and fan motors



Internal Step Deck (Optional)

- Platform and grab rail for access to elevated fan section components
- V coil models only



Adiabatic Pre-Cooling System (Optional)

- Wetted pads can be utilized for pre-cooling entering air, resulting in greater energy savings, and increased capacity, with minimal water use
- Great for high dry bulb climates and high temperature applications
- Once through design
- No water treatment required
- No cold water basin or pump
- No drift
- V coil models only

eco-Air Design & Construction Features

Advanced Motor Technology

Electronically Commutated (EC) or Alternating Current (AC) fan motor designs

Alternating Current (AC)

- Direct drive
- Zero maintenance sealed bearings
- VFD ready
- Severe Duty



Electronically Commutated (EC)


EC motors are the latest development in energy savings and speed control. The high efficiency wing tip fans operate up to 3 dB less than conventional blade fans with improved part speed energy consumption.

- Integrated speed control



Flat Coil Models

- Low profile design
- Great for elevated installations with bottom airflow clearance

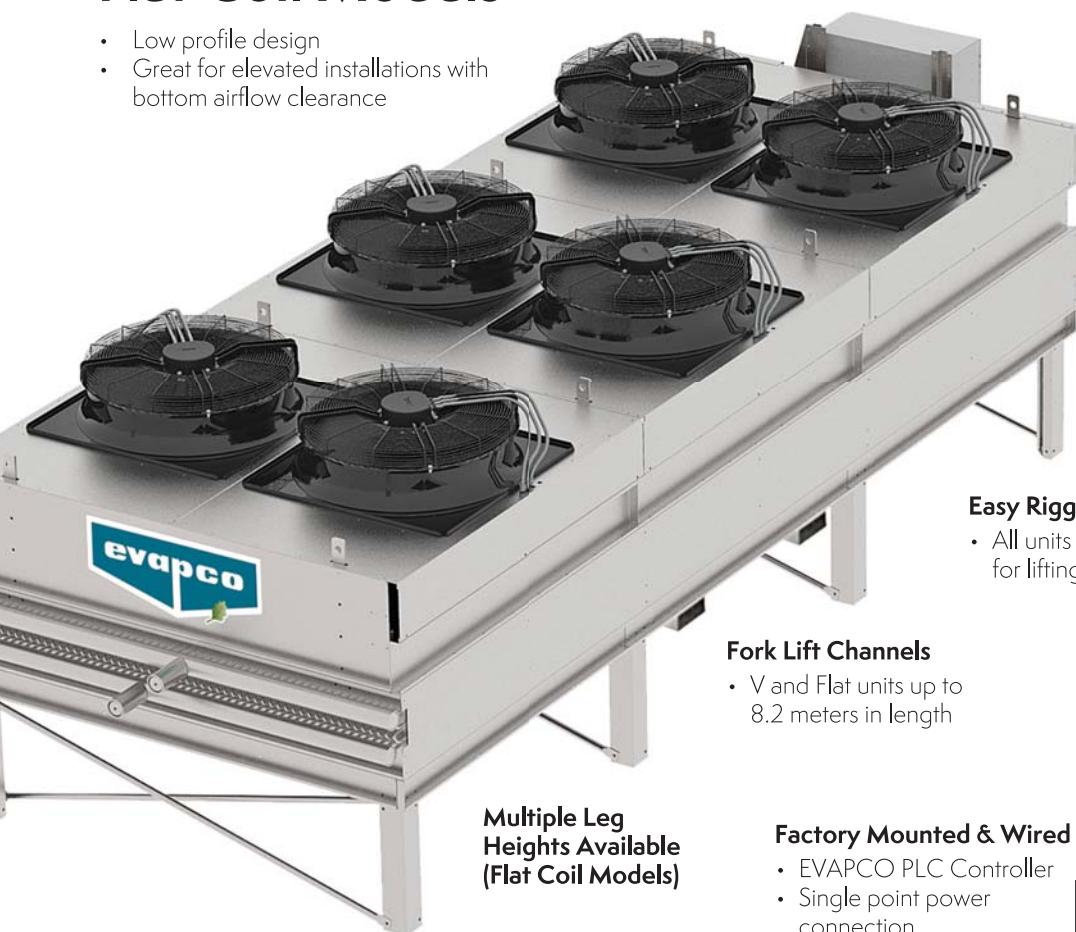

Coil Return Bend Covers

- Protects the coil return bends during handling and operation



Easy Rigging

- All units are designed for lifting as one piece

Fork Lift Channels

- V and Flat units up to 8.2 meters in length

Coils Pressurized with Nitrogen

- Limits internal corrosion potential during transport and storage

Multiple Leg Heights Available (Flat Coil Models)

Factory Mounted & Wired Controls (Optional)

- EVAPCO PLC Controller
- Single point power connection
- CE Compliance



Common Terminal Box

- All motors factory wired
- Saves time in the field




IBC Compliant Design

- All standard models meet IBC requirements
- Upgraded designs available for high seismic and wind load areas
- Shake table verified for 1.5 Importance Factor installations

Dry Principle of Operation

eco-Air Series V Coil (EAVCD) & Flat Coil (EAFCD) Air Cooled Condenser


Superheated refrigerant vapor enters the inlet header connections. Heat from the refrigerant dissipates through the coil tubes and out to the fins. Ambient air is drawn over the coil surface by the fans located at the top of the unit. Heat from the refrigerant transfers to the air which is then discharged to the atmosphere. Condensed refrigerant exits the unit through the outlet connections.

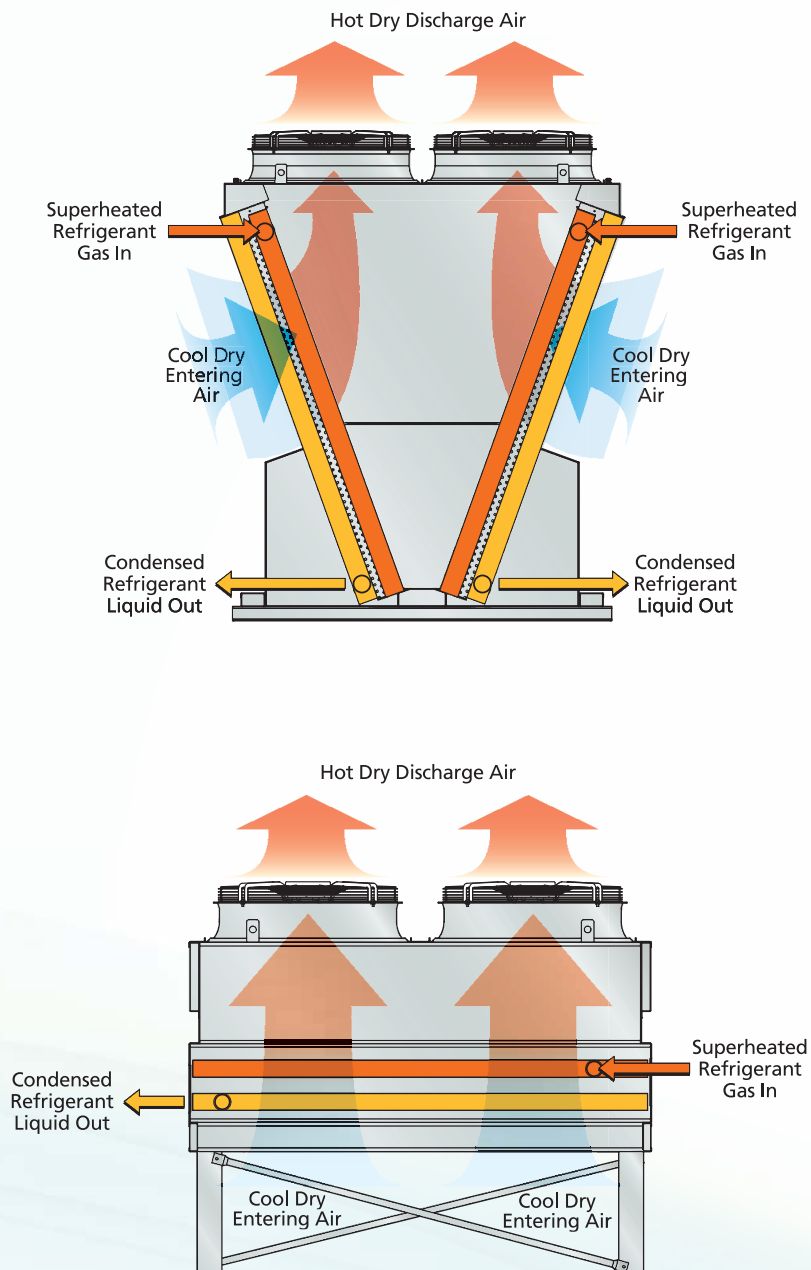

Adiabatic Principle of Operation

eco-Air V Coil (EAVCA) Adiabatic Condenser

Superheated refrigerant vapor enters the inlet header connections. Heat from the refrigerant dissipates through the coil tubes surface and out to the fins. The adiabatic air pre-cooling system involves fully wetting a fibrous pad located on the air-on side of the coil. Ambient air is drawn through the adiabatic pre-cooling pads by the fans located on top of the unit. The air saturates as it passes through the adiabatic pad, decreasing the dry bulb temperature to within a few degrees of the wet bulb temperature. This new air temperature is referred to as the depressed dry bulb. The pre-cooled air is then drawn through the tube and fin surface, providing a substantial increase in heat rejection capability. Heat from the process fluid transfers to the air which is then discharged to the atmosphere. Condensed refrigerant exits the unit through the outlet connections.

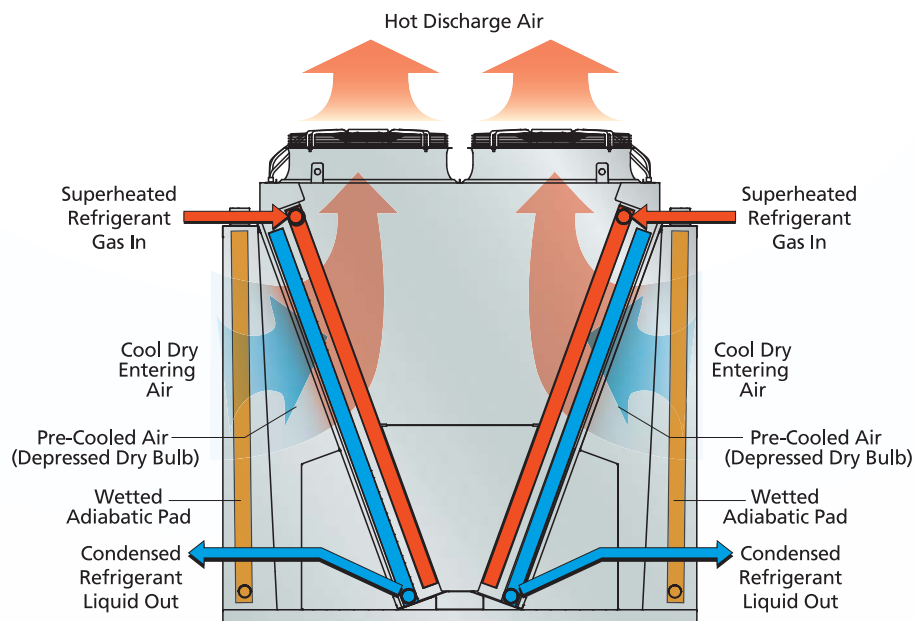

Advanced Coil Technology

EVAPCO has long been the industry innovator in heat exchanger coil technology starting in the early 1990's with the introduction of Thermal-Pak® coils which revolutionized the refrigeration industry. Soon after, EVAPCO became the benchmark in industrial evaporator design, standardizing on stainless steel tubes and aluminum fins. The eco-Air Series coil design builds upon this past success. The coil tube diameter, geometry, and circuiting have been optimized through thousands of hours of theoretical modeling and laboratory testing. The result is optimal heat transfer efficiency with low airside pressure drop and low motor kW per ton.

Coil Design

Through the use of computational fluid dynamics (CFD) modeling software, finite element heat transfer analysis, and proprietary coil performance calculation methods, EVAPCO engineers have identified significant design elements to improve the finned coil performance. The extensive computer modeling has been refined and verified through coil performance evaluation in EVAPCO's state of the art research laboratories.

Superior Stainless Steel Technology

eco-Air Series air cooled condensers are constructed with high-grade Type 304L stainless steel tubing and aluminum fins as standard. The stainless steel tubing meets the requirements of ASME B31.5 refrigerant piping code. The tubing is roll formed and continuously welded, annealed, and tested using an eddy current device.

The round tubing is fit into the aluminum fin plate and hydraulically expanded. This procedure provides more consistent contact between the tube and the fin plate than mechanical expansion. The entire coil is then pressure tested to 110% of design working pressure. Lastly, the coil is dried, evacuated, and charged with low-pressure nitrogen prior to shipment.

EVAPCO's stainless steel tubes are available in 5/8-inch (16mm) OD. Coils are built in 6, 8, 10 or 12 FPI as standard using a full-collar aluminum fin. Multiple fin thicknesses are available to accommodate a range of industrial applications.

For applications where corrosion of the aluminum fin is a concern, EVAPCO offers pre-coated epoxy fin stock.



Benefits of eco-Air Series

Reduced Maintenance

Scaling, corrosion, and water born bacteria concerns are minimized or eliminated with dry and adiabatic cooling equipment. The eco-Air Series reduces the maintenance traditionally associated with fully evaporative systems.

The eco-Air Series adiabatic condenser is designed as a once through system, meaning it has no pump and no basin to hold water, which further reduces the time required for maintenance. Additionally, the adiabatic pads filter the air before reaching the coil, limiting the exposure of dirt and debris to the tube and fin heat transfer surface.

Both AC and EC motor options are totally enclosed motors. There are no bearings to grease, belts to adjust, or fans to pitch and balance.



Adiabatic Pad Drip Pan

Reduced or Eliminated Water Consumption

Compared to traditional evaporative systems, the eco-Air Series will either eliminate or dramatically reduce water consumption. Adiabatic models only use water when the ambient conditions and load require it. Reducing water consumption also reduces the ongoing expenses related with the cooling equipment such as purchasing, treating, and disposing of water.

When the eco-Air Series adiabatic models are used in conjunction with the EVAPCO controls package, water conservation is maximized based on proprietary PLC logic.



Totally Enclosed Motors

Factory Mounted and Wired Controls

The motors on the eco-Air Series are pre-wired at the factory, reducing costs associated with field wiring. As standard, all units are wired to a common terminal box. Adding the EVAPCO controls package allows for both single point power supply and complete capacity control.

Installation Made Easy

All units are designed for lifting and staging in one piece.

Fork lift channels come standard on all eco-Air Series units up to 8.2 meters in length. On longer units, reference the eco-Air Series IO&M for lifting requirements from the fan deck lifting lugs.



Factory Wired Fan Motors



Factory Mounted Control Panel

Wiring and Control Options

Factory wiring and control options are available for both air cooled and adiabatic condensers. Many eco-Air Series configurations allow for single point power and factory mounted components. Please consult your sales representative or EVAPCO Marketing for job specific details.

Common Terminal Box (standard) - All motors wired to a common terminal box located on the end panel opposite refrigerant connections.



Individual Motor Disconnect Switches (optional) - Mounted at each fan motor to give the user the ability to isolate individual motor power feeds.




Wiring and Control Options

EVAPCO Control Package – Operating sequence and fan speed control based on real time heat loads and ambient conditions.



- EVAPCO PLC Controller
- Supervisory control system integration
- Fan speed control
 - EC Motor Option: Modbus control of EC fan
 - AC Motor Option: Packaged VFD fan speed control with bypass switch
- CE Compliance
- IEC IP55 Rated
- Thermal overload and short circuit protection of each motor
- Operate and fault indicator lights on outside of panel
- Refrigerant Pressure Sensor (shipped loose)
- Ambient Temperature Sensor
- Rain/Sun Protection Hood (optional)
- Solenoid control of adiabatic pre-cooling system (if equipped)

Solenoid Control of
Adiabatic Pre-cooling
System (if equipped)

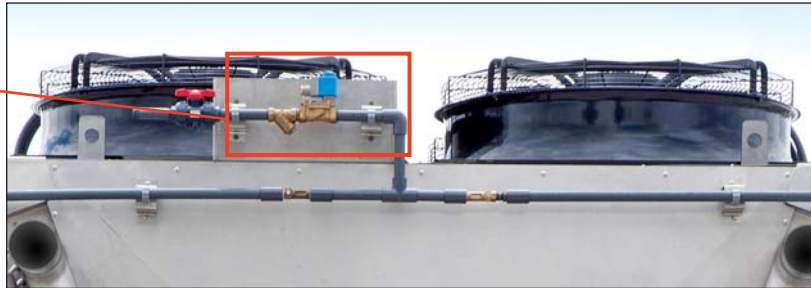



Adiabatic water supply solenoid valve arrangement

The EVAPCO Control Package is factory mounted and wired when configuration and shipping limitations allow.



Structural Steel Support

eco-Air Series Supporting Steel Dimensions		
V Models	Dry Unit Base Width (W)	Adiabatic Unit Base Width (W)
1.3m Wide	1270mm	1778mm
2.2m Wide	2197mm	2680mm
2.4m Wide	2229mm	2762mm
F Models	Base Width (W)	–
1.8m Wide	1710mm	–
2.2m Wide	2111mm	–
2.4m Wide	2311mm	–

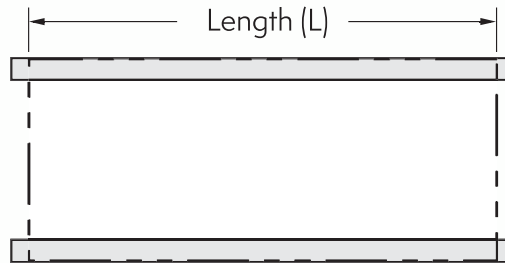

Length as shown on "unit length range (L)" in catalog table

1. These are suggested arrangements for preliminary layout purposes. Consult your EVAPCO representative for factory certified steel support drawings.
2. The recommended support for the eco-Air Series condensers is structural I-beams running the entire length of the unit. Mounting holes, 19mm in diameter are provided for bolting to the structural steel.
3. Beams should be sized in accordance with accepted structural practices. Maximum deflection of beam under unit to be 1/360 of the unit length, not to exceed 13mm.
4. Beams should be level before setting the unit in place. Do not level the unit by shimming between it and the I-beams.
5. Support beams and Anchor bolts are to be furnished by others.
6. Dimensions, weights and data are subject to change without notice. Refer to the factory certified drawings for exact dimensions.

EVAPCO Technical Support Services

EVAPCO Representatives

Your EVAPCO representative is the local expert you can count on to help you with all your industrial refrigeration needs—from getting quotes, to answering questions, to helping you manage your projects and orders. Find your local representative, by visiting www.evapcoasia.com now.

SPECTRUM™ by EVAPCO


SPECTRUM™ is a new industry leading computer selection program that makes it easy for you to find and optimize the right EVAPCO solutions for every project. Evaluate thermal performance, layout, and energy requirements across units; analyze optional equipment features; and generate complete specifications and unit drawings—all within a friendly and intuitive format. Contact your EVAPCO representative to access SPECTRUM™ now.



evapcoasia.com

Bookmark www.evapcoasia.com for the latest and most complete product information. The website contains a multitude of information and resources including:

- Product catalogs
- Rigging instructions
- Operation and maintenance instructions
- White papers
- Videos

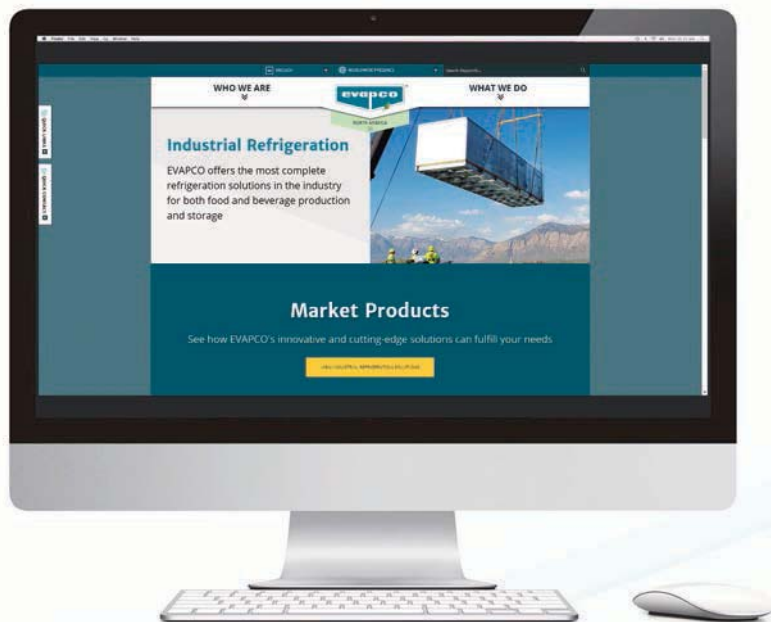



WORLDWIDE MANUFACTURING FACILITIES



★ World Headquarters/
Research and
Development Center

■ EVAPCO Facilities

EVAPCO, Inc. — World Headquarters & Research / Development Center

P.O. Box 1300 • Westminster, MD 21158 USA
410-756-2600 p • marketing@evapco.com • evapco.com

North America

EVAPCO, Inc. World Headquarters

P.O. Box 1300
Westminster, MD 21158 USA
410-756-2600 p | 410-756-6450 f
marketing@evapco.com

EVAPCO East

5151 Allendale Lane
Taneytown, MD 21787 USA
410-756-2600 p | 410-756-6450 f
marketing@evapco.com

EVAPCO East

Key Building
Taneytown, MD USA
410-756-2600 p
marketing@evapco.com

EVAPCO Midwest

Greenup, IL USA
217-923-3431 p
evapcomw@evapcomw.com

EVAPCO West

Madera, CA USA
559-673-2207 p
contact@evapcowest.com

EVAPCO Iowa

Lake View, IA USA
712-657-3223 p

EVAPCO Iowa

Sales & Engineering
Medford, MN USA
507-446-8005 p
evapcomn@evapcomn.com

EVAPCO Newton

Newton, IL USA
618-783-3433 p
evapcomw@evapcomw.com

EVAPCOLD

Greenup, IL USA
217-923-3431 p
evapcomw@evapcomw.com

EVAPCO-BLCT Dry Cooling, Inc.

1011 US Highway 22 West
Bridgewater, NJ 08807 USA
Phone: 1-908-379-2665
E-mail: info@evapco-blct.com

EVAPCO-BLCT Dry Cooling, Inc.

7991 Shaffer Parkway
Littleton, CO 80127 USA
Phone: 1-908-379-2665
E-mail: info@evapco-blct.com
Spare Parts Phone: 908-895-3236
Spare Parts e-mail: spares@evapco-blct.com

EVAPCO Power México S. de RL de C.V.

Calle Iglesia No. 2, Torre E
Tizapan San Ángel, Del. Álvaro Obregón
Ciudad de México, D.F. México 01090
Phone: +52 (55) 8421-9260
e-mail: info@evapco-blct.com

Refrigeration Valves & Systems Corporation

A wholly owned subsidiary of EVAPCO, Inc.
Bryan, TX USA
979-778-0095 p
rsv@rvscorp.com

EvapTech, Inc.

A wholly owned subsidiary of EVAPCO, Inc.
Lenexa, KS USA
913-322-5165 p
marketing@evaptech.com

Tower Components, Inc.

A wholly owned subsidiary of EVAPCO, Inc.
Ramsey, NC USA
336-824-2102 p
mail@towercomponentsinc.com

EVAPCO Alcoil, Inc.

A wholly owned subsidiary of EVAPCO, Inc.
York, PA USA
717-347-7500 p
info@alcoil.net

Europe

EVAPCO Europe BVBA European Headquarters

Heersterveldweg 19
Industrieterrein Oost
3700 Tongeren, Belgium
(32) 12-395029 p | (32) 12-238527 f
evapco.europe@evapco.be

EVAPCO Europe, S.r.l.

Milan, Italy
(39) 02-939-9041 p
evapcoeuropa@evapco.it

EVAPCO Europe, S.r.l.

Sondrio, Italy

EVAPCO Europe GmbH

Meerbusch, Germany
(49) 2159-6956 18 p
info@evapco.de

EVAPCO Air Solutions

A wholly owned subsidiary of EVAPCO, Inc.
Aabybro, Denmark
(45) 9824 4999 p
info@evapco.dk

EVAPCO Air Solutions GmbH

Garbsen, Germany
(49) 5137 93875-0 p
info@evapcoas.de

Evap Egypt Engineering Industries Co.

A licensed manufacturer of EVAPCO, Inc.
Nasr City, Cairo, Egypt
2 02 24022866 / 2 02 24044997 p
primacool@link.net / shady@primacool.net

EVAPCO S.A. (Pty.) Ltd.

A licensed manufacturer of EVAPCO, Inc.
Isando 1600, Republic of South Africa
(27) 11-392-6630 p
evapco@evapco.co.za

Asia/Pacific

EVAPCO Asia/Pacific Headquarters

1159 Luoning Road
Baoshan Industrial Zone
Shanghai 200949, P.R. China
(86) 21-6687-7786 p | (86) 21-6687-7008 f
marketing@evapcochina.com

EVAPCO (Shanghai) Refrigeration Equipment Co., Ltd.

1159 Luoning Road, Shanghai, P.R. China
(86) 21-6687-7786 p
marketing@evapcochina.com

EVAPCO (Beijing) Refrigeration Equipment Co., Ltd.

No. 66 the 4th Block, Yanqi Economic Development Zone, Huairou District, Beijing 101407, P.R. China
(86) 10-6166-7238 p
evapcobj@evapcochina.com

EVAPCO Australia (Pty.) Ltd.

Riverstone NSW 2765, Australia
(61) 2 9627-3322 p
sales@evapco.com.au

EVAPCO Composites Sdn. Bhd

Rawang, Selangor, Malaysia
(60-3) 6092-2209 p

EvapTech Asia Pacific Sdn. Bhd

A wholly owned subsidiary of EvapTech, Inc.
Puchong, Selangor, Malaysia
(60-3) 8070-7255 p
marketing-ap@evaptech.com

South America

EVAPCO Brasil

Equipamentos Industriais Ltda.
Al. Vênus, 151 – CEP: 13347-659
Indaiatuba – São Paulo – Brasil
(55+11) 5681 2000 p
vendas@evapco.com.br

Fan Technology Resource

Cruz das Almas – Indaiatuba
São Paulo, Brasil 13308-200
55 (11) 4025-1670
fantr@fantr.com

